


CANOVA

CNV45 | CNV60


Spiral kneading machine

Project No	_____
Item	_____
Quantity	_____
Approval	_____
Date	_____

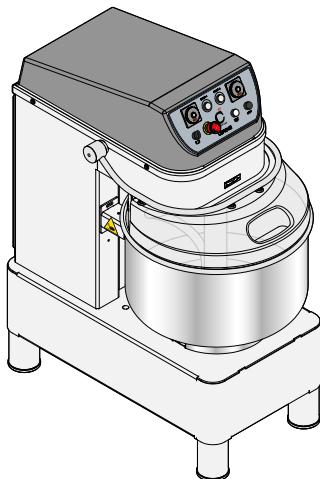

CONTROL

- Double start buttons:** they start rotation in speed 1 or 2. The rotation is stopped by pressing the STOP key.
- Double operation timer:** they set the rotation times for speeds 1 and 2. Rotation stops at the end of the set time.
- Double display:** the two displays show the rotation times set for speeds 1 and 2.
- Emergency mushroom:** if pressed, it interrupts the operation. The mushroom must be used in a real emergency; to stop the appliance normally, use the STOP button.
- Bowl only rotation button** (even with the bowl cover up)
- Bowl rotation direction selector.**
- Stop button:** rotation is stopped.

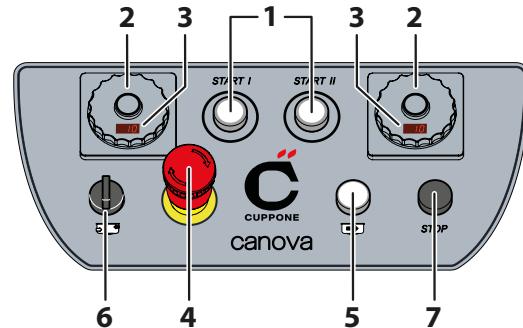

STANDARD EQUIPMENT


- Header cover in thermoformed material
- Bowl cover guard in transparent PETG
- Bowl, spiral, flour guard and contrast column in stainless steel
- Bowl support rollers
- Painted steel structure raised from the ground (3 fixed and one adjustable feet)
- Bowl rotation inversion

- Possibility of spiral rotation only
- Double speed
- Two motors
- Possibility of setting the timer for 1st and 2nd speed
- Belt drive

PRODUCTIVITY AND ELECTRICAL DATA


	FINISHED DOUGH (kg lb)	ELECTRICAL SUPPLY (V)	POWER (kW)		ABSORPTION (A)	CABLE TYPE (Nxmm ²)	CUSTOMER PANEL PROT. (NxA)
			FIRST SPEED	SECOND SPEED			
CNV45	45 kg 99.2 lb	3Nx400V	2	3.4	4.9	5x0.75	4x16
CNV60	60 kg 44 lb		2	3.4			

TECHNICAL DATA

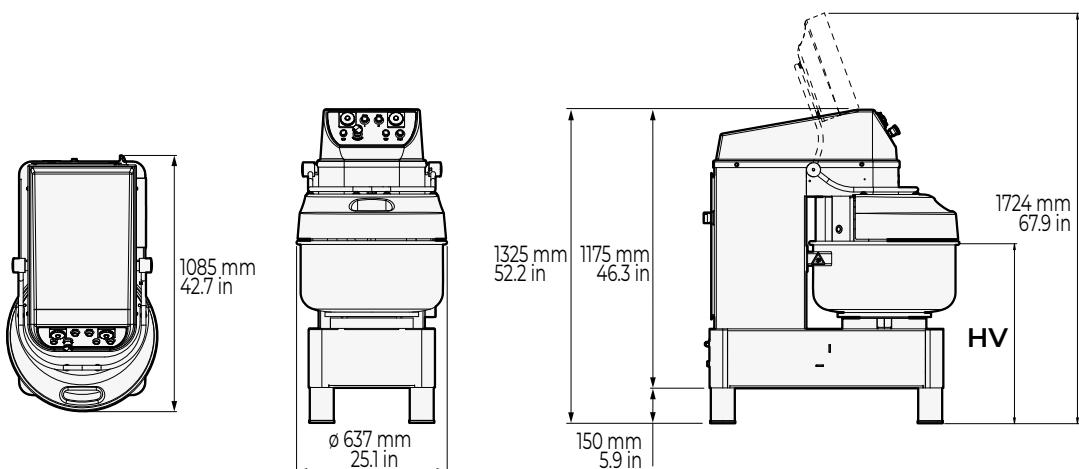

	REVOLUTIONS PER MINUTE		WEIGHT	BOWL DATA		
	BOWL (1 st speed)	SPIRAL (1 st speed 2 nd speed)		DIAMETER	HEIGHT	CAPACITY
CNV45	11 RPM	101 203 RPM	372 kg 820 lb	771,5 mm 30.4 in.	300 mm 11.8 in.	80 l 21 gal
CNV60			375 kg 827 lb	831,5 mm 32.7 in.	600 mm 23.6 in.	360 mm 14.2 in.

MINIMUM DISTANCES

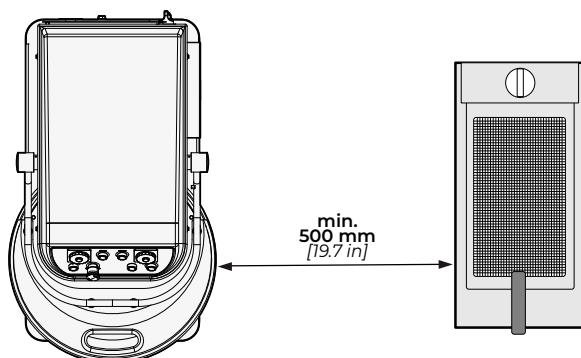

PREPARATIONS

